


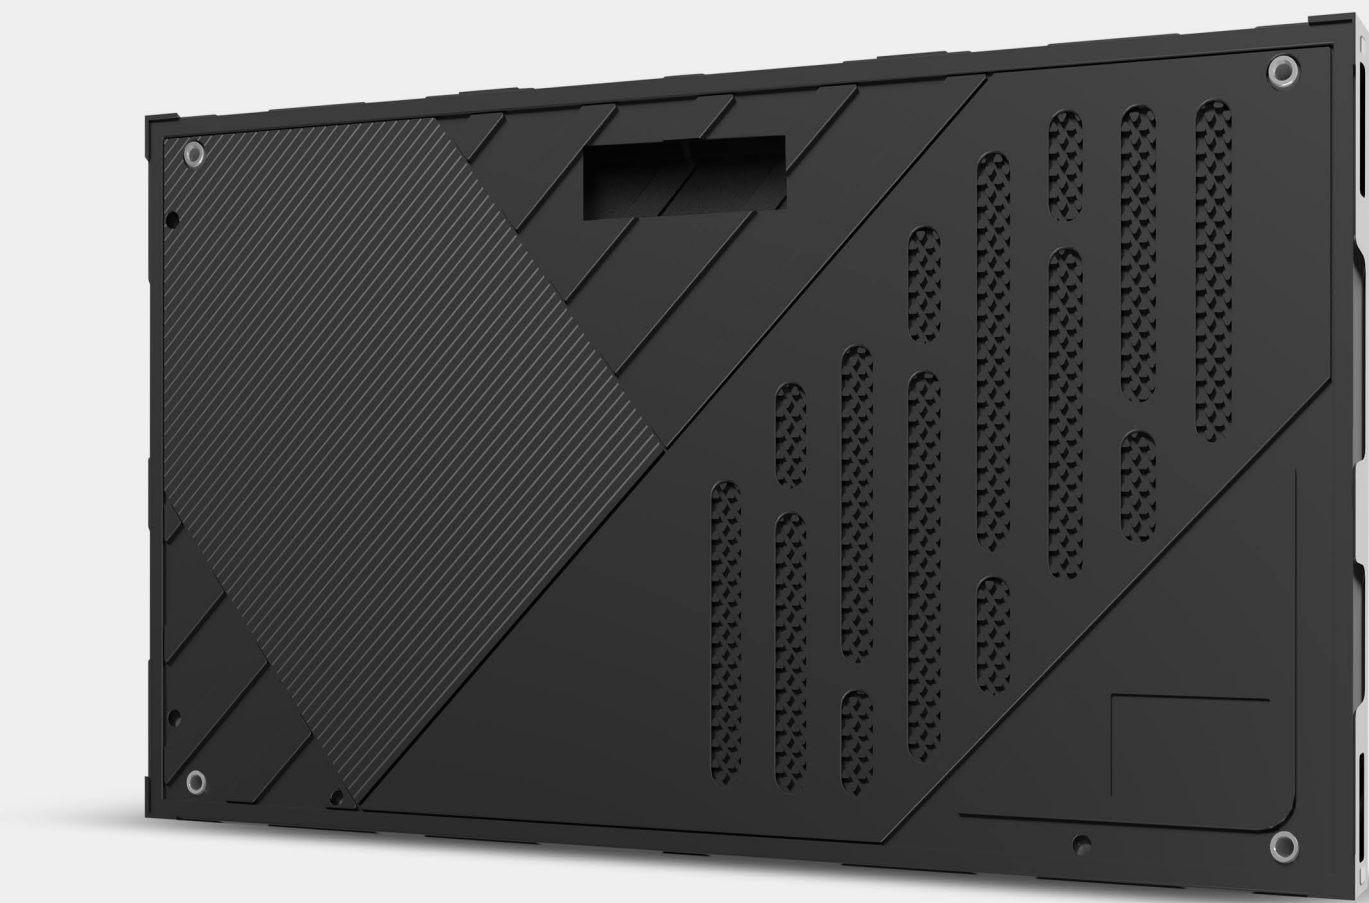

INDOOR HIGH DEFINITION LED DISPLAY

Pixel Pitch	0.78125mm	0.9375mm	1.25mm	1.5625mm	1.875mm
LED Type	COB	COB	SMD1010	SMD1010	SMD1010
Pixel Density(dot/sqm)	1,638,400	1,137,778	640,000	409,600	284,444
Module Size(mm)	150 x 168.75	150 x 168.75	300 x 168.75	300 x 168.75	300 x 168.75
Panel Resolution(WxH)	768 x 432	640 x 360	480 x 270	384 x 216	320 x 180
Panel Dimensions(WxHxD)	600mm x 337.5mm x 27.5mm				
Weight Per Panel	4.5kg				
Panel Material	Die-casting aluminum				
Brightness	<600 nits(256 levels adjustable)				
Gray Scale	16 bit				
Refresh Rate	3840 Hz				
Viewing Angle	Horizontal 160°; Vertical 140°				
IP Rating	IP31				
Contrast Ratio	6000:1				
Color Temperature	3000-10000K(optional)				
Power Consumption	120W/sqm(avg); 420W/sqm(max)				
Input Power Source	AC100-240V; 50-60Hz				
Operating Temperature	-20°C to +50°C				
Relative Humidity	10% to 85%RH				
Serviceability	Full front service				