


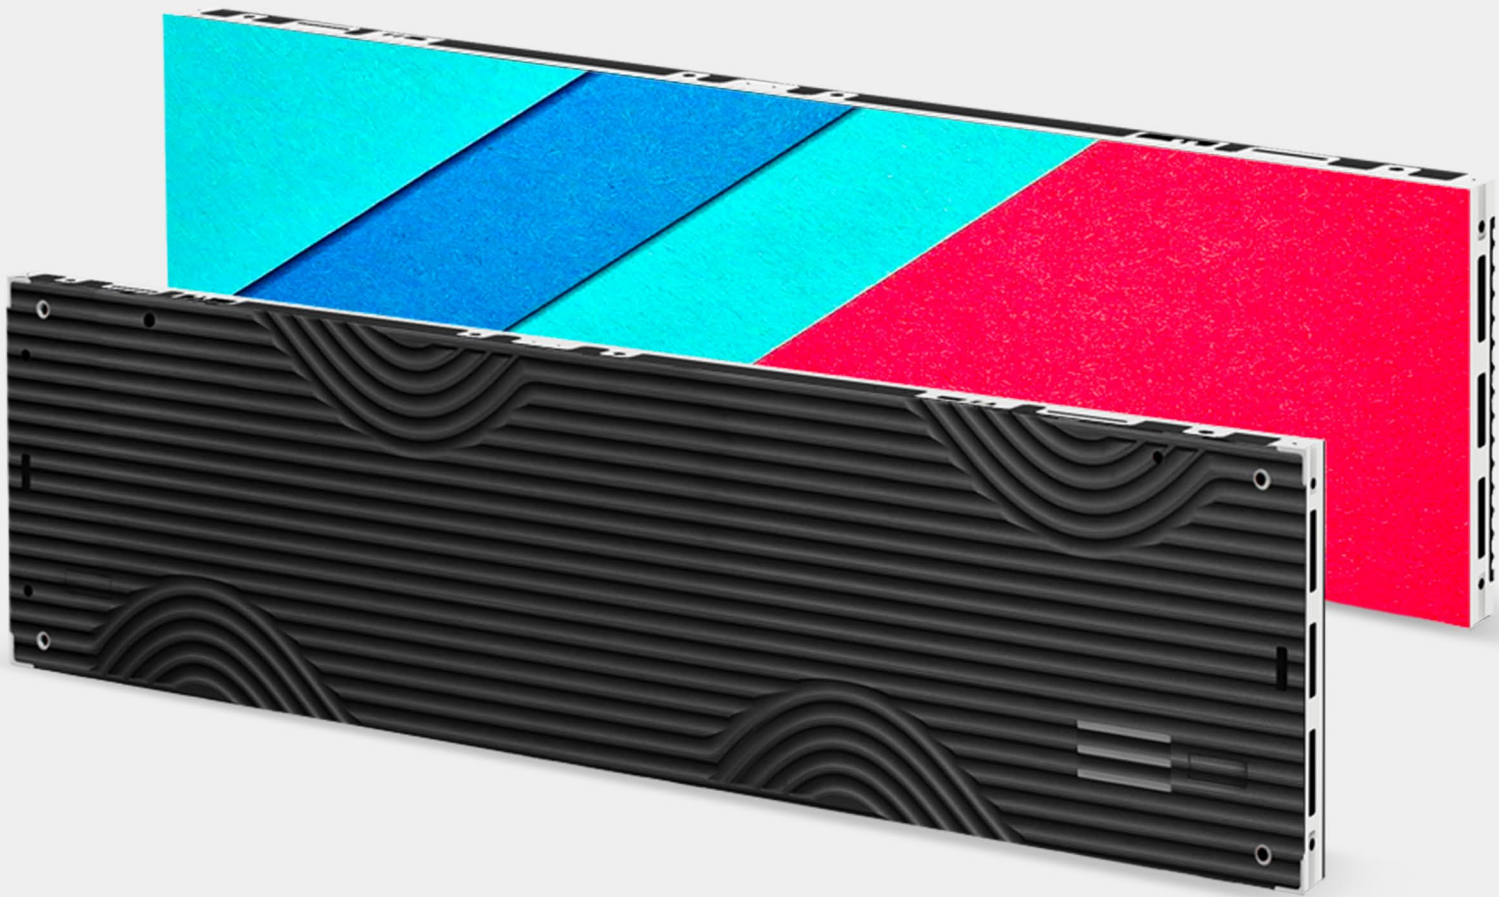

1000X250MM ULTRA SLIM INDOOR LED DISPLAY

Pixel Pitch	1.25mm	1.5625mm	1.95mm	2.5mm	2.976mm	3.91mm
Pixel LED	SMD1010	SMD1212	SMD1515	SMD1515	SMD1515	SMD2121
Pixel Density(dot/sqm)	640,000	409,600	262,144	160,000	112,896	65,536
Module Size	250mm x 250mm					
Module Resolution	200 x200	160x 160	128 x 128	100x 100	84 x 84	64 x 64
Panel Dimensions(WxHxD)	1000mm x 250mm x 33mm					
Panel Resolution(WxH)	800 x200	640 x 160	512x 128	400x 100	336x 84	256x 64
Weight Per Panel	6kg					
Panel Material	Aluminum					
Brightness	>600nits (256 levels adjustable)					
Gray Scale	12 bit to 16 bit					
Refresh Rate	1920 to 3840Hz					
Viewing Angle	Horizontal 160°; Vertical 140°					
IP Rating	IP43					
Contrast Ratio	6000:1					
Color Temperature	3000-10000K (optional)					
Power Consumption	200W/sqm(avg);600W/sqm(max)					
Input Power Source	AC100-240V; 50-60Hz					
Operating Temperature	-20°C to +50°C					
Relative Humidity	10% to 85%RH					
Serviceability	Front service					